

All data taken at the Pacific Northwest National Laboratory
FTS Operators: John S. Loring and Ashley M. Bradley
Data Analysis: Russell G. Tonkyn

Composite spectrum for: Trimethyl phosphate

- First Column: Position in wavenumber (cm^{-1})
- Second column: Real refractive index $n(\tilde{\nu})$ (dispersion index)
- Third column: Imaginary refractive index, $k(\tilde{\nu})$ (absorption index per unit length in centimeters)

Where the complex refractive index $\hat{n} = n(\tilde{\nu}) + ik(\tilde{\nu})$

Following Bertie (in the references below) we define the absorbance as $A = -\log_{10}(I/I_0)$ and the linear absorption coefficient $K = A/d$, where d is the path length. The connection between the imaginary refractive index and the absorbance coefficient arises from the following: $2.303K = 4\pi\tilde{\nu}k$

See the following references for a detailed description of terms and units:

- 1) Bertie, J. E., Zhang, S. L., Eysel, H. H., Baluja, S., & Ahmed, M. K. (1993). Infrared Intensities of Liquids XI: Infrared Refractive Indices from 8000 to 2 cm^{-1} , Absolute Integrated Intensities, and Dipole Moment Derivatives of Methanol at 25°C . *Appl. Spec.*, 47(8), 1100-1114 doi:10.1366/0003702934067973
- 2) Bertie, J. E., Zhang, S. L., & Keefe, C. D. (1995). Measurement and use of absolute infrared absorption intensities of neat liquids. *Vibrational Spectroscopy*, 8(2), 215-229. doi:10.1016/0924-2031(94)00038-i

Sample:

- Chemical name, formula and CAS number: Trimethyl phosphate, $\text{C}_3\text{H}_9\text{O}_4\text{P}$, [512-56-1]
- IUPAC name: Trimethyl phosphate
- Synonyms: TMP; Phosphoric acid trimethyl ester; Trimethoxy phosphine oxide; Trimethyl orthophosphate
- Physical properties: FW = 140.076 g/mole; mp = -46°C ; bp = 197°C ; $\rho = 1.197\text{ g/cm}^3$
- Supplier and stated purity: MIR: Aldrich, $\geq 98\%$ (Lot # 73496JM); NIR: Aldrich, $\geq 99\%$ (Lot # MKCL7895)
- Temperature of sample: 26°C ($\pm 1^\circ\text{C}$)
- Individual samples were measured at the following path lengths: MIR: 1.9, 2.6, 3.2, 4.1, 9.8, 14.4, 15.5, 35.9, 51.4, 97.2, 200, 503 and $1042\text{ }\mu\text{m}$; NIR: 109, 187, 523, 1001 and $3104\text{ }\mu\text{m}$. Final data are a composite of these spectra.
- Sample cell window material is potassium bromide (KBr).
- Preparation: None

NIR Instrument Parameters:

- Bruker Vertex 70, purged with UHP nitrogen
- Spectral range: 10,000 to $3,000\text{ cm}^{-1}$ (1.0 to 3.33 microns)
- IR source: Quartz tungsten bulb
- Beamsplitter: Broadband Potassium bromide (KBr)
- Detector: DLTGS at room temperature
- Aperture: 3 mm
- Folding limits: 31604.8 to 0 cm^{-1}

MIR Instrument Parameters:

- Bruker Vertex 70, purged with UHP nitrogen
- Spectral range: $7,800$ to 400 cm^{-1} (1.282 to 25 microns)
- NIR source: Silicon carbide glow bar
- Beamsplitter: Broadband Potassium bromide (KBr)
- Detector: DLTGS at room temperature
- Aperture: 4 mm
- Folding limits: 15800 to 0 cm^{-1}

NIR/MIR Instrument Parameters:

- Instrument resolution: 2.0 cm^{-1}
- Number of interferograms averaged per single channel spectrum: 128
- Apodization: Norton-Beer, Medium
- Phase correction: Mertz
- Scanner velocity: 10 kHz
- Interferogram zerofill: 4x
- Spectral interval after zerofilling: 0.4823 cm^{-1}

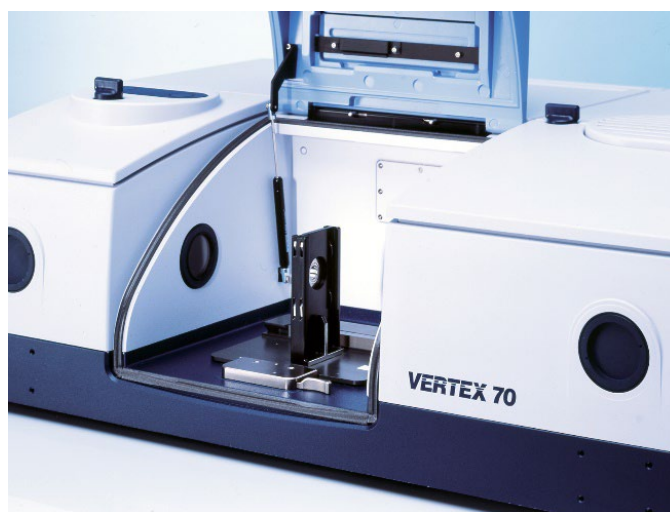


Figure 1: The Bruker Vertex 70 FTIR.

Measured Refractive Index:

The refractive index for TMP was measured at $25\text{ }^{\circ}\text{C}$ using an Atago model DR-M2/1550 Abbe refractometer. Notch filters were employed in front of a white light source to make measurements at multiple wavelengths. An infrared viewer from Atago was used to detect signal at 1550 nm . The temperature was controlled to match that in the sample compartment of the FTIR using a heated circulating bath.

480 nm:	$n = 1.3989$	486 nm:	$n = 1.3982$	546 nm:	$n = 1.3961$
589 nm:	$n = 1.3946$	644 nm:	$n = 1.3931$	656 nm:	$n = 1.3928$
1550 nm:	$n = 1.3871$				

The refractive index, n , vs. wavelength in microns, λ , was fit to an equation similar to that of Sellmeier:

$$n(\lambda) = \{a + b/(\lambda^2 - c)\}^{1/2}$$

The resulting best-fit equation was used to find the refractive index at the highest energy data points in our experimental spectra. For TMP, the results were

$$\begin{aligned} n(7,800\text{ cm}^{-1}) &= 1.3877 \text{ at } 25\text{ }^{\circ}\text{C} \text{ for MIR data and} \\ n(10,000\text{ cm}^{-1}) &= 1.3889 \text{ at } 25\text{ }^{\circ}\text{C} \text{ for NIR and merged data.} \end{aligned}$$

Post Processing and Related Parameters:

For the MIR, a composite spectrum was created from 13 absorbance spectra (base-10) taken at 13 path lengths: 1.9, 2.6, 3.2, 4.1, 9.8, 14.4, 15.5, 35.9, 51.4, 97.2, 200, 503 and 1042 micrometers (μm). For the NIR, a composite spectrum was created from 5 absorbance spectra (base-10) taken at 5 path lengths: 109, 187, 523, 1001 and 3104 μm . At each path length several spectra were measured and the results averaged for better signal to noise. The measured cell lengths were adjusted using Beer's law plots in which the NIR and MIR data were analyzed independently.

- 1) The imaginary part of the refractive index, or k vector, was determined for each absorbance file as per Bertie's program "RNJ46A" (see reference above). This takes into account the reflective losses due to the KBr windows.
- 2) A composite k vector is created via a classical, weighted, linear, least squares fit using the output files of program "RNJ46A": Intercept=0, slope is fitted, individual absorbance values weighted by T^2 (transmission squared), all absorbance values ≥ 2.5 are given zero weight. For the MIR, six composite vectors were created and merged by hand.
 - a) The first k vector used the results from the 1042 and 503 μm cells. This k vector determined the final values for the range from 7800 to 4800 cm^{-1} .
 - b) The second k vector used the results from the 200 through 34 μm cells. This k vector determined the final values for the range from 4800 to 3040 cm^{-1} .
 - c) The third k vector used the results from the 36, 15, 13, 10, and 3 μm cells. This k vector determined the final values for the range from 3040 to 2800 cm^{-1} .
 - d) The fourth k vector used the results from the 200 through 15 μm cells. This k vector determined the final values for the range from 2800 to 1600 cm^{-1} .
 - e) The fifth k vector used the results from the 1 through 10 μm cells. This k vector determined the final values for the range from 1600 to 600 cm^{-1} .
 - f) The final k vector used the results from the 10 through 51 μm cells. This k vector determined the final values for the range from 600 to 400 cm^{-1} .
- 3) A frequency correction was applied to the resulting composite MIR k vector.
 - a) Frequency correction (already applied): $\tilde{\nu}(\text{corrected}) = [\tilde{\nu}(\text{instrument}) * 0.99996 - 0.078212]$ as determined by comparing measured atmospheric spectral lines (H_2O and CO_2) to values from the Northwest Infrared Spectral Library Database.
- 4) For the NIR, three composite vectors were created and merged by hand.
 - a) The first k vector used the results from the 1001 and 3104 μm cells. This k vector determined the final values for the range from 10,000 to 6400 cm^{-1} .
 - b) The second k vector used the results from the 523 through 3104 μm cells. This k vector determined the final values for the range from 6400 to 4900 cm^{-1} .
 - c) The third k vector used the results from the 109 through 3104 μm cells. This k vector determined the final values for the range from 4900 to 400 cm^{-1} .
- 5) The resulting composite NIR k vector and the refractive index at 10,000 cm^{-1} were used to create the real or n vector using the Kramers-Kronig relation, as per Bertie's program "LZZKTB."
 - a) Frequency correction (already applied): $\tilde{\nu}(\text{corrected}) = [\tilde{\nu}(\text{instrument}) * 0.999748 + 0.00481475]$ as determined by comparing measured atmospheric spectral lines (H_2O and CO_2) to values from the Northwest Infrared Spectral Library Database.
- 6) Finally, the MIR data were mapped onto the NIR x-axis using an interpolation routine, i.e. the Make Compatible command in OPUS 5.5. Then the composite MIR and NIR k vectors were merged to generate a final composite k vector across the entire spectral range. The NIR data were used exclusively above 3300 cm^{-1} , and only the MIR data were used below 3100 cm^{-1} . A weighted average, with the weight of the MIR vector increasing linearly from 0 to 100% between 3300 and 3100 cm^{-1} was used in the overlapping spectral region. The resulting composite k vector and the refractive index at 10,000 cm^{-1} were used to create the final n vector using the Kramers-Kronig relation, as per Bertie's program "LZZKTB."
 - a) Calculated and estimated errors: Type A = 0.7%.
 - b) Axis units: X = Wavenumbers (cm^{-1}); Y = Absorbance (base 10).

Photographs of Sample Trimethyl phosphate:



Figure 2: Trimethyl phosphate in Aldrich container for MIR measurements.



Figure 3: Trimethyl phosphate in Aldrich container for NIR measurements.